

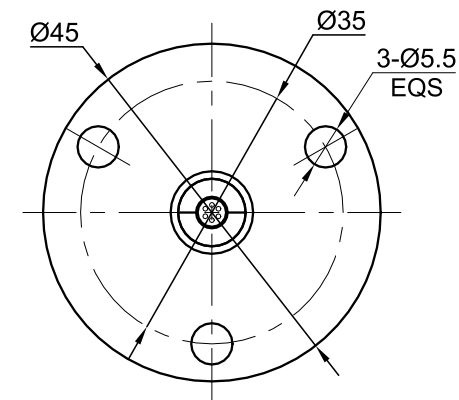


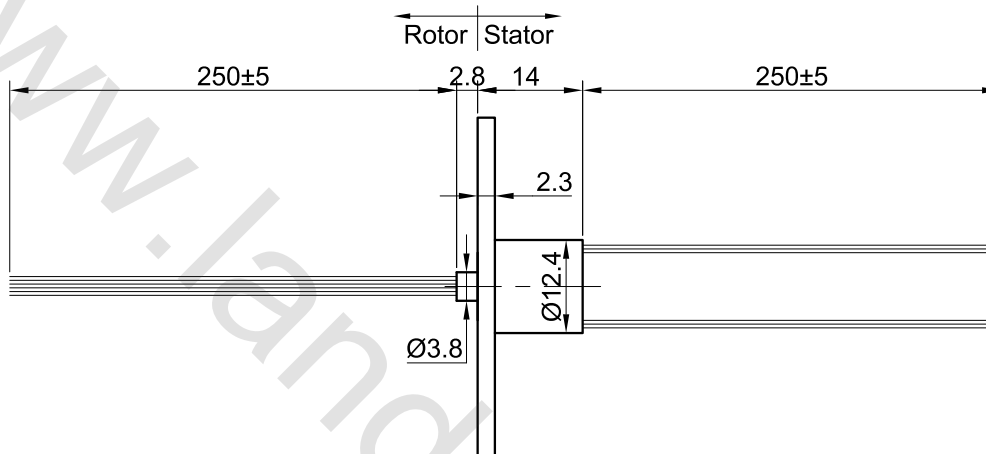

AWG28#Teflon



Specification

Group	Signal
Number of circuits	6
Voltage/Current	240VDC/2A
Dielectric strength	500VAC@50Hz.60s
Insulation resistance	≥500MΩ/500VDC
Dynamic contact resistance	≤10mΩ
Contact material	Precious metal
Housing material	Engineering plastics
Operating speed	0-250rpm
Operating temperature	-20℃~+80℃
Sealing degree	IP51

Model:SRC012A-6

Date:12/2024

S/N:



RoHS

www.hzqs.com

Slip ring outline drawing

				Unless otherwise Angle±0.5°	Slip ring outline drawing							 PROSPER 金盛机电
				Linear dimension	Designer	CLF	2025/01/02	Model	SRC012A-6			
				0.5-6±0.1								
				>6-30±0.2	Auditor	zly	2025/01/02	Customer	C0819			
				>30-120±0.3								
				>120-400±0.5	Approved	www	2025/01/02	Weight	page:1			
				>400-1000±0.8								
01	The first revision	CLF	2025/01/02	>1000-2000±1.2		Scale	--	Version	01	Hang zhou Prosper M&E Technology Co., Ltd		
Ver	Changes	Name	Date	>2000-4000±2.0								

